



M.B. BUTTERFIELD & CO. PTY LTD

H Y D R A U L I C E N G I N E E R S

502 - 504 Port Road

Welland, South Australia 5007

T [08] 8340 1899


F [08] 8340 1640

ABN 54 007 893 085

mbbhyd@bigpond.net.au

Hydraulic Gear Pump and Motor Manufacturers

New Product Release

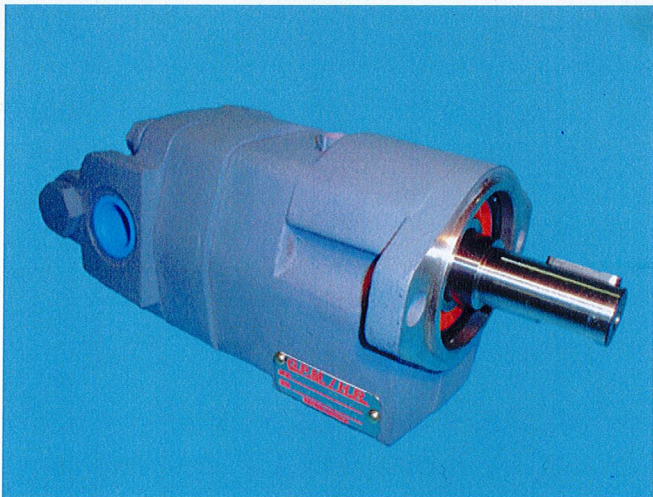

Hydraulic motors with built in over-hung load capabilities. Suitable for direct mounted fan drives and other applications.

Combination 2 Bolt "A" mounting front flange and bottom pad mounting face.

Long standout 1" keyed shaft, 1/4" key, drilled and tapped 5/16" unf.

Maximum speed 3000 rpm. Higher speeds on engineering approval.

Maximum pressure 3500 psi (240 Bar).

Displacement 10.2cc to 40.6cc, in 5 cc increments

All motors are dual rotation.

Also available with built in over-run, anti-cavitation check valve in the rear cover. Motor rotation needs to be nominated.

1 1/16" unf o-ring side ports as standard.

7/16" unf 0-ring case drain.

Also available as a belt driven pump

